




● 特性 Feature

- 高度密集，多個電阻在一個表貼封裝中  
High density, more than 1 resistors in one small case
- 安裝效率高  
Improvement of placement efficiency
- 良好的可焊性  
Superior solder ability

● 降功率曲線 Derating Curve

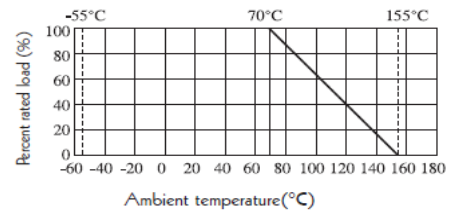

● 規格 & 等效電路 Dimension & Equivalent Circuit Diagram

	2D02	4D02
Dimension (mm)		
Equivalent Circuit Diagram	<p>R1=R2</p>	<p>R1=R2=R3=R4</p>
	4D03	16P8R
Dimension (mm)		
Equivalent Circuit Diagram	<p>R1=R2=R3=R4</p>	<p>R1=R2=R3=R4=R5=R6=R7=R8</p>

● 性能 Specification

Type	2D02	4D02	4D03	16P8R
Power rating (70°C)	1/16W	1/16W	1/16W	1/16W
Max Working Voltage	25V	25V	50V	50V
Max Overload Voltage	50V	50V	100V	100V
Resistance Range	10Ω~1 MΩ	10Ω~1 MΩ	1Ω~1 MΩ	1Ω~1 MΩ
Tolerance	±1% ±5%			
Operating Temperature	-55°C~+155°C			
Resistance Value of 0Ω	<50mΩ			
Rated Current of 0Ω	1A			

● 測試要求 Test Methods

同凹电极产品性能和测试要求