● 特性 Feature

- Use high-precision alloy materials
- Low resistance, high accuracy, low temperature coefficient, good stability
- Has no sense, high overload capacity

● 降功率曲線 Derating Curve

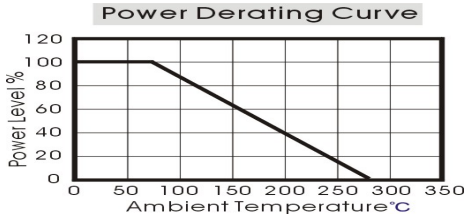

● 尺寸 Dimension

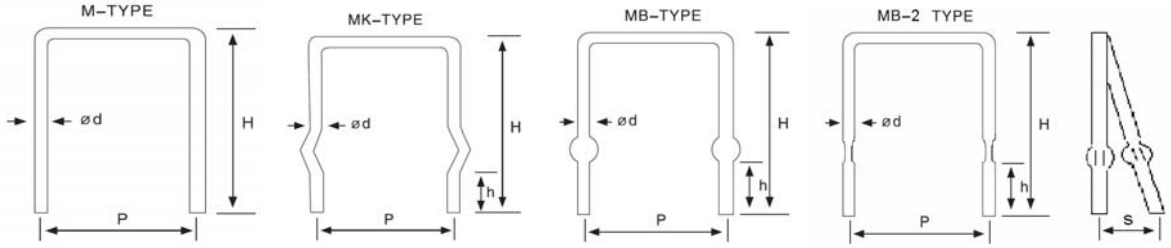

TYPE	Dimension (mm)				
	P±0.5	H±0.3	h±0.2	d±0.02	S
M	5~15	4~12	----	0.6~2.0	1mm MAX
MK	4~10	12~18	2.8~4.0	0.6~2.0	
MB / MB-2	4~8	12~18	2.8~4.0	0.6~2.0	

Diameter (mm)	Maximum rated current (A)	Resistance Range (mΩ)	Temperature coefficient (PPM/℃)	Operating Temperature
0.6	3.0	50~100	±40PPM/℃	-55℃~275℃
0.8	4.5	10~50		
1.0	5.0	6~30		
1.2	7.0	5~20		
1.5	9.0	3~20		
1.6	9.5	3~15		
1.8	11	3~10		
2.0	12	2~10		



TYPE	Power Rating	Resistance Range	Tolerance	Inductance	Dimension (mm)				
					L	H	H1	B	D
MSR	1W	0.005~0.1Ω	±1%,±5%	<10nH	11.5±1	5±2.5	4±0.5	1.65±0.5	1±0.05
	3W	0.005~0.1Ω	±1%,±5%	<10nH	15±1	25.5 MAX	4±0.5	1.65±0.5	1±0.05
	5W	0.005~0.05Ω	±1%,±5%	<10nH	20±1	25.5 MAX	4±0.5	1.65±0.5	1±0.05

◎Only provide average power or diameter, resistance, installation size, current and other parameters can be produced on request

◎Diameter above requirements are not listed can also produce