


● 特性 Feature

1. 表面分平繞和立式波紋，立式波紋有利于散熱，減低寄生電感器。
2. 採用耐高溫、阻燃油漆封裝，有效延長使用壽命。
3. 可按要求做成串聯或並聯多腳引出
4. 可做成阻值可調型
5. 可按客戶特殊要求開發相應的產品

● 降功率曲線 Derating Curve

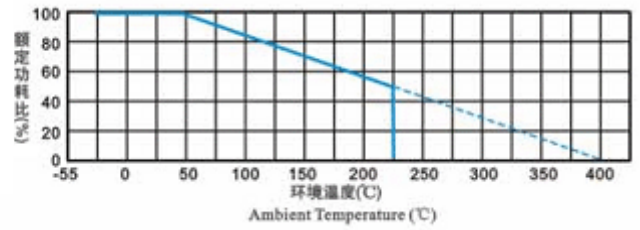

● 形狀 & 構造 Figures & Construction

平繞型(DR)



立式波紋 (QR)




多腳引出型



可調型(QHA)



● 尺寸 Dimension

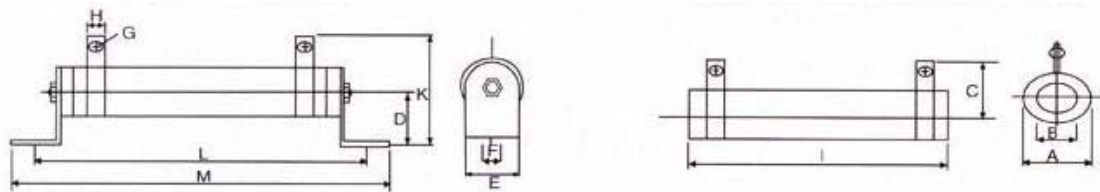

功率	A±1	B±1	C±1	D±2	E±1	F±1	G±1	H±1	J±5	K±3	L±5	M±5
10W	14	6	22	19	15	5	3	6	40	40	61	84
20W	21	13	30	22	20	5	3	6	50	52	75	98
30W	21	13	30	22	20	5	3	6	70	52	96	120
40W	21	13	30	22	20	5	3	6	90	52	116	140
50W	28	18	32	30	27	7	5	8	90	62	116	140
80W	28	18	32	30	27	7	5	8	135	62	165	192
100W	28	18	32	30	27	7	5	8	170	62	195	220
150W	28	18	32	30	27	7	5	8	215	62	243	270
200W	28	18	32	30	27	7	5	8	267	62	293	320
300W	40	25	46	44	40	7	6	10	267	90	295	340
400W	40	25	46	44	40	7	6	10	330	90	355	405
500W	50	35	46	44	48	8	7	10	330	90	360	410
800W	60	40	67	77	60	8	7	13	400	144	440	505
1000W	60	40	67	77	60	8	7	13	430	144	470	535
2000W	70	42	71	73	70	8	7	13	430	144	480	545
3000W	80	58	76	86	80	8	7	16	430	162	480	545
4000W	100	76	93	75	100	9	7	18	425	168	480	545
5000W	100	76	93	75	100	9	7	18	533	168	588	653
8000W	100	76	93	75	100	9	7	18	640	168	695	760
10000W	100	76	93	75	100	9	7	18	855	168	910	975