





■ 特性

- 圓柱形方便設計安裝
- 具有高可焊性特殊電極端子
- 高精度度 (容許誤差可達 ±0.1%，溫度係數可低達 ±15PPM/°C)
- 電極強度高於晶片電阻器
- 比厚膜晶片電阻更低的雜音

■ 降功率曲線

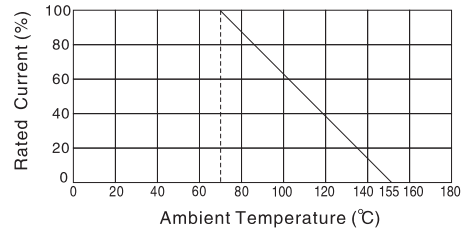

■ 外形、結構、尺寸



底漆：土黃色
標示：色環標示 (三色環標示)

Item	Material
①	Insulation Coating
②	Marking
③	Cutting Line
④	Ceramic Core
⑤	Resistive Film
⑥	Terminal

Type		Dimension (mm)			Max. Continuous Working Voltage	Max. Overload Voltage	Operating Temperature Range
Size	Power	L	K min	D			
0204	1/8W	3.5 ± 0.2	0.5	1.40 ± 0.15	150V	300V	-55°C ~ +155°C
	1/4WS	3.5 ± 0.2	0.5	1.40 ± 0.15	200V	400V	
0207	1/4W	5.9 ± 0.2	0.5	2.2 ± 0.20	250V	500V	
	1/2WS	5.9 ± 0.2	0.5	2.2 ± 0.20	250V	500V	
	1WSS	5.9 ± 0.2	0.5	2.2 ± 0.20	350V	700V	
0309	1/2W	8.5 ± 0.2	0.5	3.2 ± 0.20	350V	700V	
	1WS	8.5 ± 0.2	0.5	3.2 ± 0.20	350V	700V	
	2WS	8.5 ± 0.2	0.5	3.2 ± 0.20	350V	700V	

注：最小包裝數量：0204: 3000PCS, 0207: 2000PCS, 0309: 2500PCS

■ 零歐姆產品

由一道黑色色環表示歐姆

Type		Dimension (mm)			Resistance Range	Dielectric Strength	Solvent Resistance
Size	Power	L	K min	D			
0204	1/4WS	3.5 ± 0.2	0.5	1.40 ± 0.15	≤50mΩ	300V	No Damage
0207	1/2WS	5.9 ± 0.2	0.5	2.2 ± 0.20		500V	